



RackAccess

Installation Guide Betriebsanleitung



SPECIFICATIONS / SPEZIFIKATIONEN

Part Numbers / Artikel-Nummern:

3115-00P-xx	RackAccess kvm console with 15" TFT Display
3117-00P-xx	RackAccess kvm console with 17" TFT Display
3115-00A	Rack Mounting Rails 950mm
3115-00B	Rack Mounting Rails 1050mm

Physical Properties / Abmessungen/Gewicht:

	Height / Höhe	Width / Breite	Depth / Tiefe	Weight / Gewicht
RackAccess 15" TFT Display	4.32cm / 1.7"	48.26cm / 19"	51.51cm / 20.28"	13kg / 28.6lb
RackAccess 17" TFT Display	4.32cm / 1.7"	48.26cm / 19"	56.59cm / 22.28"	15kg / 33lb

Operation and Storage parameters / Betriebs- und Lagerbedingungen:

	RackAccess 15" TFT Display	RackAccess 17" TFT Display
Operating Temperature: Betriebstemperatur:	0~40° C (32 to 104° F)	0~40° C (32 to 104° F)
Humidity: Feuchtigkeit:	10~85% RH non-condensing	10~85% RH non-condensing
Storage Temperature: Lagertemperatur:	-20~60° C (-4 to 140° F)	-20~60° C (-4 to 140° F)
Humidity: Feuchtigkeit:	10~95% RH non-condensing	10~95% RH non-condensing

Connections / Verkabelung:

PC:	All in one D-Sub 15 pin Female (Keyboard, Video and Mouse)
Upgrade	Mini Din 6 pin Female
Power	IEC Female connector

Monitor

	RackAccess 15" TFT Display	RackAccess 17" TFT Display
Display Area: Farbanzeige:	30.4 x 22.8 cm / 12 x 9"	33.7 x 27.0 cm / 13.7 x 10.64"
Scan frequency horizontal Scanfrequenzen	31.47K to 68KHz	31.47K to 68KHz
Scan frequency vertical Scanfrequenzen:	60Hz to 85Hz	60Hz to 75Hz
Viewing Angle Blickwinkel:	160° Horizontal & Vertical	140° Horizontal, 110° Vertical
Pixels: Auflösung:	1024 x 768	1280 x 1024
Pixel pitch: Pixel pitch:	0.297 x 0.297 mm	0.264 x 0.264 mm
Picture tube Bildschirmgröße	15" TFT Active Matrix panel	17" TFT Active Matrix panel
Video Videosignale:	Analog RGB 7Vp-p/75Ω	Analog RGB 0.7 Vp-p
Sync:	Separate	Separate
Video Connector: Videoanschlüsse:	15pin Mini D-Sub	15pin Mini D-Sub

Keyboard / Tastatur

Keys	88 key keyboard & 17 key numeric keypad
Travel	3mm / 0.11"
Typing force	60g ± 20g / 2.11oz ± 0.70oz
Life cycle	10 million key presses

Touchpad

Compatibility	Industrial standard
Mouse button	Two key buttons
Life cycle	>1 million cycles

Operations / Bedienung

	Operations	Bedienung
User Controls: Benutzertasten:	On/Off Power Button Contrast, Brightness, Select and adjust buttons 8/16 key PC selection keys	On/Off Schalter Kontrast, Helligkeit, Auswahl-tasten 8/16 Umschalt-tasten
On Screen Display Adjustment Einstellungen:	Auto-Adjustment Contrast, Balance Phase, Pixel clock TXT/GFX Selection Colour temperature & brightness	Automatische Einstellungen Kontrast, Balance Phase, Pixel clock TXT/GFX Auswahl Farbtemperatur & Helligkeit
Control type	Digital	Digital

Power

Input	110-240 VAC (auto sensing) 48-62Hz
Consumption	35 Watts maximum (On) on 15" RackAccess 45 Watts maximum (On) on 15" RackAccess 1 Watt Power Saving Mode (Off)

Agency Approvals / Zertifizierungen

EMI	FCC-A and CE
Emissions	MRP-II
Safety	UL, cUL
Energy Saving	EPA energy star, VESA DPMS

NOTE: This equipment complies with the requirements of European EMC directive 89/336 EEC in respect of EN55022 Class B, EN 50082-1 and EN 60555-2.
This equipment has been found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.



© Copyright 2003. All rights reserved.

Daxten, the Daxten logo, RackAccess and The Brains Behind KVM Switching and Sharing are trademarks of Daxten Industries. All other trademarks acknowledged.

Revision 1.3

Introduction

The RackAccess is compact 1U high rack mountable TFT Screen, keyboard and mouse. With screens available in 2 sizes 15" and 17"

Product Features

- Operating system independent, transparent to all applications.
- Plug and play system configuration.
- LCD panel size: 15" or 17"
- Keyboard layouts in English UK and US, German, French, Spanish, Swiss, Dutch, Danish, Russian, Swedish and Norwegian
- High VGA resolution 1024x768 on the 15" model and 1280x1024 on the 17" model
- 88key keyboard + 17key numeric keypad
- Standard 19" Rack mounting accessories

High Video Quality


The RackAccess built in TFT LCD monitor supports resolution up to 1024x768 (15") or 1280x1024 (17"), with a colour depth to 16M (dithering). With automatic adjustment to easily configure your LCD setting for optimum video quality.

LCD monitor's OSD operation

Control Functions

The Monitor control functions are located right to the screen.

The control key description

1. MENU Activate the on screen display function
2. ▽ Down / Brightness control
3. ▲ Up / Brightness control
4. + Increment / Contrast control
5. - Decrement / Contrast control
6.  Power Switch

Description

1. Menu

Press the Menu key to activate the on screen display screen. It is a toggle key. Press twice to turn off the OSD. After 30 seconds idle time, the OSD screen will automatically turn off.

2. ▽ & ▲: Select key/ Brightness Control keys

The two keys have two sets of functions:

- When OSD screen is not activated, the two keys are used to adjust the brightness
- When OSD screen is activated (when "Menu" key is pressed), the two keys are used to select the required adjustment items

3. - & +: decrement & increment/ Contrast Control keys

The two keys have two sets of functions:

- When OSD screen is not activated, the two keys are used to adjust the contrast
- When OSD screen is activated (when "Menu" key is pressed), the two keys are defined to decrease or increase the values of each selected item.

4. Power switch


Use the power switch to turn ON or OFF power. We recommend turning your system on first, then the LCD monitor.

Adjusting the Monitor

The LCD monitor is designed to work with a range of compatible video adapters on the market. Due to the possible deviations between these video adapters, you may make some adjustment to fit the monitor for adapter used.

Adjustment Procedure

First, you must activate the OSD screen through pressing the MENU key, the screen will show in the centre of screen as below:

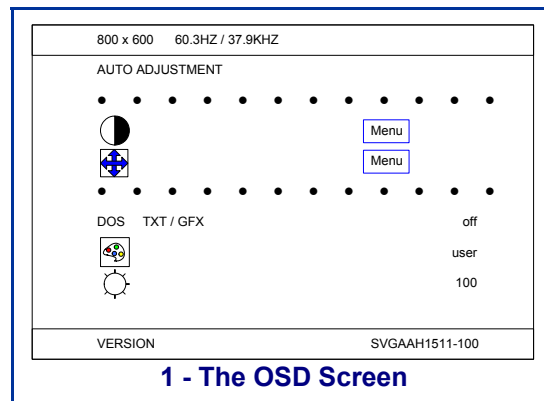

Note: In the last paragraph, we will assume that you had already done this procedure and only explain how to change the setting.

Use the ∇ & Δ key to select the required adjustment item up or down.


Use the - & + key to do the desired function or go into the second menu item to do the further change.

Auto-Adjustment


We strongly recommend that you use the Auto-Adjustment to get the optimized visual quality.

Use the Δ & ∇ key to select auto-adjustment, then press - or + to get the optimized quality.

RGB Adjustment

Use the Δ & ∇ key to select the  icon, then press - or +, the screen will display as below

Adjust the Contrast Value

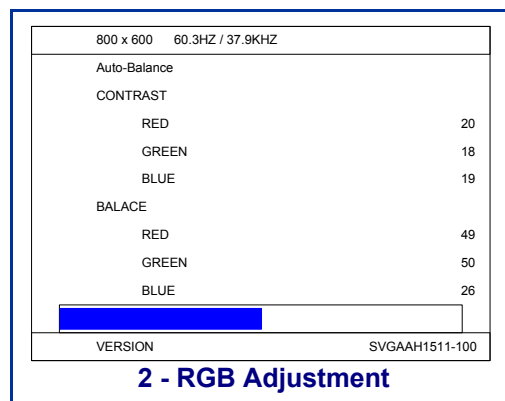


Use the Δ & ∇ key to select the CONTRAST item, press - or + to get the best contrast optimization. You can adjust R, G, B, values simultaneous or R, G, B values individually, (you can use this item to change the RGB purity.)


Colour Balance

Use the Δ & ∇ key to select the balance item, then press - & + to get the best colour balance effect or separate set the RGB colour value. (You can use this item to change the RGB intensity)

The easy way to adjust the contrast and colour balance setting is to use the auto-balance item.


Geometry Adjustment


Use the Δ & ∇ key to select the icon, then  press - & +, then the screen will display as below

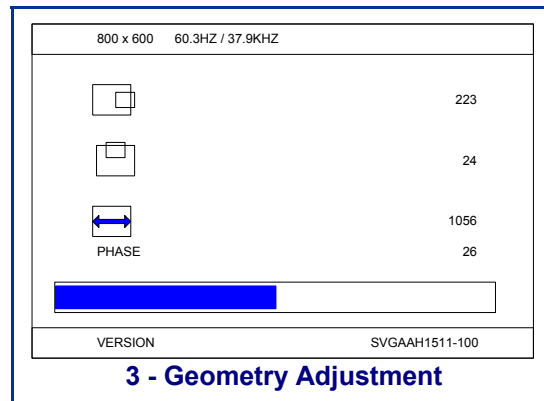


If you want to go back to the previous OSD menu screen, pressing the MENU key, you will see the OSD screen as shown on page 5.

Vertical & Horizontal Position adjustment

Use the Δ & ∇ key to move to the  icon, then press - & + to move the whole screen left or right to the centre position.

Use the Δ & ∇ key to move to the  icon, then press - & + to move the whole screen down or up to the centre position.

Adjust the viewing screen size

Use the Δ & ∇ key to move to the  icon, then press - & + to get the larger viewing size.

PHASE adjustment


Adjust phase tracking of display signal to reduce the display flicker. The invalid phase tracking will cause unstable and flicking display.

Use the Δ & ∇ key to move to the Phase item, then press - & + to get better image quality.


DOS TXT/GFX

Now, you can select the display mode as 640 x 400 (called graphic mode), or 720 x 400 (called Text mode).

Colour Temperature

We provide three modes, one is user mode, one is 6500 and the other is 9300. Use the Δ & ∇ key to move to the colour temperature, then press - & + to select the colour temperature setting. When set at 6500 or 9300, you can not change the  value.

Brightness Adjustment

Use the Δ & ∇ key to select the  icon then press - & + to change the brightness value.

The Display Resolution Setting

In the OSD screen, you will see the horizontal frequency (HF), vertical frequency (VF), display resolution (MODE) and the monitor firmware version (ROM LEVEL). It is automatically detected by the monitor, and you can not change this setting.

Service Information

Technical Support

If you cannot determine the nature of a problem, please call Daxten and ask for Technical Support. If possible, call from a phone located near the unit, as we may be able to solve your problem directly over the phone. If we cannot solve your problem, and determine that the fault is in the unit, we will issue a Return Material Authorisation (RMA) number that must appear on the outside of all returned products. The unit should be double-packed in the original container, insured, and shipped to the address given to you by our Technical Support representative. The Technical Support offices are found on the back of this manual.

Limited Warranty

Daxten warrants to the enduser that this product is and will be free from defects in materials and workmanship for a period of 24 months from the date of purchase. If during the warranty period the product should fail, the purchaser must promptly call Daxten for a RETURN MATERIALS AUTHORIZATION (RMA) number. Make sure that the RMA number appears on the packing slip, proof of purchase, AND ON THE OUTSIDE OF EACH SHIPPING CARTON. Unauthorized returns or collect shipments will be refused.

Ship prepaid to the Daxten office (see back page) where you purchased your product. The above limited warranty is voided by occurrence of any of the following events, upon which the product is provided as is, with all faults, and with all disclaimers of warranty identified below:

1. If non-Daxten approved cabling is attached to the Scout.
2. If defect or malfunction was caused by abuse, mishandling, unauthorized repair, or use other than intended.
3. If unauthorized modifications were made to product.
4. If unreported damages occurred in any shipment of the product.
5. If damages were due to or caused by equipment or software not provided by Daxten.
6. If the Scout is used with non-grounded or incorrectly polarized AC power.
7. If the product is used in contradiction to any instruction provided by any User Guide or Instruction Sheet provided to you or with the product.

EXCEPT AS SPECIFICALLY PROVIDED ABOVE AND TO THE MAXIMUM EXTENT ALLOWED BY LAW, DAXTEN DISCLAIMS ALL WARRANTIES AND CONDITIONS WHETHER EXPRESS, IMPLIED, OR STATUTORY AS TO ANY MATTER WHATSOEVER INCLUDING, WITHOUT LIMITATION, TITLE, NON-INFRINGEMENT, CONDITION, MERCHANTABILITY OR FITNESS FOR ANY PARTICULAR OR INTENDED PURPOSE.

EXCEPT AS EXPRESSLY PROVIDED ABOVE AND TO THE MAXIMUM EXTENT ALLOWED BY LAW, DAXTEN SHALL NOT BE LIABLE FOR ANY SPECIAL, INDIRECT OR CONSEQUENTIAL DAMAGES (INCLUDING WITHOUT LIMITATION, LOSS OF PROFIT, LOSS OF BUSINESS, LOSS OF INFORMATION, FINANCIAL LOSS, PERSONAL INJURY, LOSS OF PRIVACY OR NEGLIGENCE) WHICH MAY BE CAUSED BY OR RELATED TO, DIRECTLY OR INDIRECTLY, THE USE OF A PRODUCT OR SERVICE, THE INABILITY TO USE A PRODUCT OR SERVICE, INADEQUACY OF A PRODUCT OR SERVICE FOR ANY PURPOSE OR USE THEREOF OR BY ANY DEFECT OR DEFICIENCY THEREIN EVEN IF DAXTEN OR AN AUTHORIZED DAXTEN DEALER HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES OR LOSSES.

Einführung

Der RackAccess ist eine Tastaturkonsole mit einem 15" LCD Monitor, einem 105 Tasten Standard Keyboard und einer PS/2 Maus in einer einzigen Höheneinheit.

Der RackAccess ist die moderne und außerordentlich effiziente Lösung, um in Serverräumen oder Multi-Computer-Anwendungen direkt am Rack Zugang zu den administrativen Servern zu erhalten.

Eigenschaften

- 19" –fähige Tastatur-, Monitor- und Maus Konsole
- Erhältlich mit 15" - oder 17" – TFT-Display
- Kompakte Tastatur mit numerischem Zahlenblock
- Touchpad mit zwei Maustasten
- Keyboardlayout in Englisch UK & US, Deutsch, Französisch, Spanisch und andere verfügbar
- Auflösung max: 1024x768x16M (Dithering)
- 105 Tasten Standard Keyboard
- Standard 19" Rackmount Zubehör

Hohe Monitorqualität

Der im RackAccess eingebaute 15" TFT LCD Bildschirm unterstützt eine Auflösung bis 1024 x 768 bei max. 16 Mio. Farben (Dithering).

LCD Monitor OSD Betrieb

Bedienungsfunktionen

Die Bedientasten des Monitors befinden sich rechts neben dem Display.

1. MENU Aktivieren der Bildschirmfunktion
2. ▾ Down / Helligkeit/Dunkelheit
3. ▲ Up / Helligkeit/Dunkelheit
4. + Vergrößerung / Kontrast
5. - Verkleinerung Kontrast
6. ⏻ Power Switch

Beschreibung

1. Menu

Drücken Sie die Menütaste um das OSD zu aktivieren (Folientasten). Drücken Sie zweimal um das OSD auszuschalten. Nach 30 Sek. im Ruhezustand schaltet sich das OSD alleine aus.

2. ▾ & ▲: Auswahl taste/ Helligkeit/Dunkelheit

Diese zwei Tasten haben zwei Funktionen:

- Wenn das OSD Menü nicht eingeschaltet ist, können Sie die Helligkeit des Monitors einstellen
- Wenn das OSD Menü eingeschaltet ist (wenn die Menütaste eingeschaltet wurde), können Sie die gewünschten Einstellungen im OSD Menü vornehmen

3. - & +: Verkleinern & Vergrößern/ Kontrasteinstellungen

Diese zwei Tasten haben zwei Funktionen:

- Wenn das OSD Menü nicht eingeschaltet ist, können Sie den Kontrast einstellen.
- Wenn das OSD Menü eingeschaltet ist (wenn die Menütaste eingeschaltet wurde), können Sie das Bild entsprechend verkleinern oder vergrößern

4. ⏻: Powerschalter

Mit "On" schalten Sie das Gerät ein, mit "Off" schalten Sie das Gerät aus. Wir empfehlen Ihnen erst das Gerät und dann den Monitor einzuschalten.

MONITOREINSTELLUNGEN

Der LCD Farbbildschirm ist VGA-, SVGA- und XGA kompatibel. Da die Geräte unterschiedliche Voreinstellungen haben, könnte es sein, dass sie Ihr Display justieren müssen.

Justierung

Sie müssen zuerst das OSD Menü aktivieren. In der Mitte des Bildschirms erscheint das unten aufgeführte Schaubild.


Benutzen Sie die Pfeiltasten Δ & ∇ um das gewünschte Menü auszuwählen

Benutzen Sie die - & + Taste um die Einstellung entsprechend zu verändern.

Auto-Adjustment


Wir empfehlen Ihnen dieses Menü um eine optimale Bildqualität zu erhalten.

Gehen Sie mit der entsprechenden Pfeiltaste Δ & ∇ zu Auto-Adjustment, und drücken Sie - oder + um die optimierte Bildqualität zu erhalten.

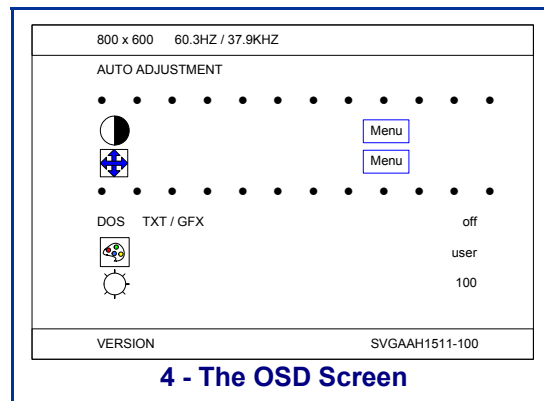

.RGB Adjustment – Farbeinstellung

Gehen Sie mit der entsprechenden Pfeiltaste Δ & ∇ zu dem Zeichen für die Farbeinstellung und drücken Sie - oder + um das gewünschte Ergebnis zu erhalten.

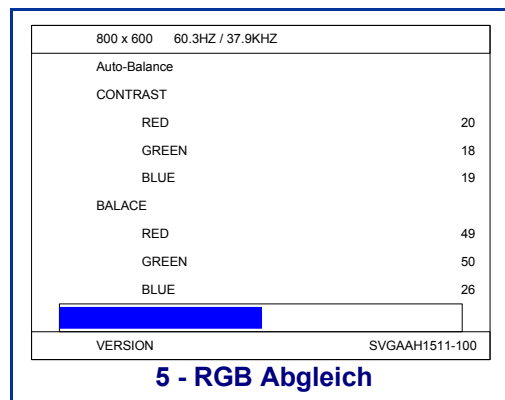

Kontrast


Wählen Sie die entsprechende Pfeiltaste um den Menüpunkt CONTRAST auszuwählen, drücken Sie - & + um den Kontrast zu optimieren. Sie können R, G, B, gleichzeitig oder einzeln einstellen.


Colour Balance – Farbabgleich

Wählen Sie die entsprechende Pfeiltaste Δ & ∇ um den Menüpunkt Balance auszuwählen, drücken Sie - & + um den gewünschten Farbabgleich zu erzielen. In diesem Menüpunkt können Sie ebenfalls die Farbintensität verändern.


Der einfachste Weg ist natürlich die Auswahl Autobalance um Kontrast und Farbabgleich einzustellen.


Geometry Adjustment – Bildschirmgeometrie

Gehen Sie mit der entsprechenden Pfeiltaste Δ & ∇ zu dem Zeichen für die Geometrie,  und drücken Sie $-$ & $+$, um die unten aufgeführte Abbildung zu sehen. Wenn Sie zum vorhergehenden Menü zurück möchten, drücken Sie die Menütaste und Sie sehen das OSD wie auf der vorhergehenden Seite abgebildet.

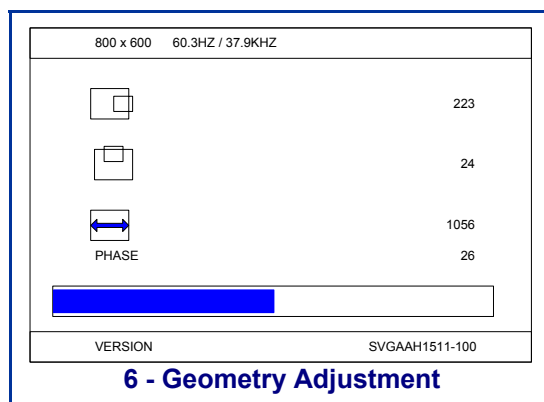


Vertical & Horizontal Position adjustment – Vertikale & Horizontale Justierung

Gehen Sie mit der entsprechenden Pfeiltaste Δ & ∇ zu diesem Zeichen , drücken Sie $-$ & $+$ um den gesamten Bildschirm nach rechts oder links zu verschieben.

Gehen Sie mit der entsprechenden Pfeiltaste Δ & ∇ zu diesem Zeichen , drücken Sie $-$ & $+$ um den gesamten Bildschirm nach oben oder unten zu verschieben.

Adjust the viewing screen size – Justieren der Bildschirmgröße

Gehen Sie mit der entsprechenden Pfeiltaste Δ & ∇ zu diesem Zeichen , drücken Sie $-$ & $+$ um die Ansicht zu vergrößern.

PHASE adjustment – Justieren der Phase

Mit den Einstelltasten wird Schärfe und Klarheit des Displays eingestellt.

Gehen Sie mit der entsprechenden Pfeiltaste Δ & ∇ zu dem Menüpunkt Phase, drücken Sie $-$ & $+$ um eine bessere Bildqualität zu erhalten.


DOS TXT/GFX

Nun können Sie den Bildschirmmodus 640 x 400 (Grafikmodus), oder 720 x 400 (Textmodus) auswählen.

Colour Temperature – Farbtemperatur

Sie haben drei Möglichkeiten: Benutzermodus, 6500 oder 9300. Gehen Sie mit der entsprechenden Pfeiltaste zu colour temperature, drücken Sie $-$ & $+$ um die entsprechende Farbtemperatur zu erhalten. Wenn der Modus 6500 oder 9300 eingestellt ist, kann der RGB Wert nicht verändert werden.

Brightness Adjustment – Justieren der Helligkeit

Gehen Sie mit der entsprechenden Pfeiltaste zu diesem Zeichen  und verändern Sie mit $-$ & $+$ die Helligkeit.

BILDSCHIRMAUFLÖSUNG

Im OSD sehen Sie die horizontale Frequenz (HF), die vertikale Frequenz (VF), die Bildschirmauflösung (Mode) und die Monitor Firmware Version (ROM LEVEL). Dies sind automatische Einstellungen, die vom Benutzer nicht verändert werden können.

SERVICEINFORMATION

TECHNISCHER KUNDENDIENST

Sollten Sie die Ursache eines Problems nicht selber finden können, wenden Sie sich bitte an Daxten und fragen Sie nach dem Technischen Kundendienst. Wenn möglich sollten Sie von einem Apparat in der Nähe des Gerätes anrufen, da wir u. U. das Problem direkt am Telefon lösen können. Können wir Ihr Problem nicht sofort lösen und stellen fest, dass das Gerät fehlerhaft ist, geben wir Ihnen eine Rücksendegenehmigungsnummer (RMA-Nummer), welche außen auf der Umverpackung aller zurückzusendender Produkte sichtbar sein muss. Das Gerät sollte zunächst in die Originalverpackung zurückgelegt und dann mit einer Umverpackung versehen werden. Sodann schicken Sie das versicherte Paket an die Adresse, die Ihnen der Technische Kundendienst mitgeteilt hat. Die Adressen des Technischen Kundendienstes finden Sie auf der Rückseite dieser Betriebsanleitung.

GARANTIE

Daxten garantiert dem Endkunden, dass dieses Produkt für den Zeitraum von 24 Monaten ab Kaufdatum frei von Material- und Herstellungsfehlern ist. Tritt während der Garantiezeit ein Fehler auf, muss sich der Käufer unverzüglich eine Rücksendegenehmigungsnummer (RMA) von Daxten geben lassen. Der Käufer muss darauf achten, dass diese Rücksendegenehmigungsnummer auf dem Packzettel, Kaufnachweis UND AUSSEN AN JEDEM VERSANDKARTON erscheint. Nicht autorisierte Rücksendungen oder nicht vorfrankierte Lieferungen werden zurückgewiesen.

Senden Sie das Produkt an die Daxten-Niederlassung, von der Sie es käuflich erworben haben (siehe Rückseite). Die oben genannte Garantie ist durch das Eintreten der folgenden Ereignisse, unter denen das Produkt bereitgestellt wird, mit allen Mängeln und mit allen unten aufgeführten Garantie-Verzichtserklärungen ungültig:

Wenn nicht von Daxten genehmigte Kabel an das Scout-System angeschlossen sind.

Wenn der Defekt bzw. die Störung durch missbräuchliche Verwendung, unsachgemäße Handhabung, nicht autorisierte Reparatur oder Einsatz für einen anderen als den Bestimmungszweck verursacht wurde.

Wenn nicht autorisierte Änderungen am Produkt vorgenommen wurden.

Wenn während eines Produkttransports nicht gemeldete Schäden auftraten.

Wenn die Schäden auf nicht von Daxten bereitgestellte Geräte oder Software zurückzuführen sind bzw. durch diese verursacht wurden.

Wenn das Gerät mit einem nicht geerdeten oder falsch gepolten Netzstromanschluss verwendet wird.

Wenn das Produkt in Widerspruch zu einer Anweisung benutzt wird, die in einem Benutzerhandbuch oder Anweisungsblatt abgedruckt ist und mit dem Produkt ausgeliefert wurde.

AUSSER WIE IN DIESEM DOKUMENT FESTGELEGT, GEWÄHRT DAXTEN IN KEINERLEI HINSICHT IRGENDWELCHE VERTRAGLICHEN ODER STILLSCHWEIGENDEN GARANTIEN, EINSCHLIESSLICH, ABER OHNE EINSCHRÄNKUNG, GARANTIEN DES PRODUKTZUSTANDS, DER MARKTGÄNGIGKEIT ODER EIGNUNG FÜR EINEN BESTIMMTEN ZWECK.

AUSSER WIE VORSTEHEND DARGELEGT, IST DAXTEN IN KEINEM FALL FÜR GEWINNVERLUSTE, GESCHÄFTSAUSFALL, SONDER- ODER FOLGESCHÄDEN ODER ANDERE FINANZIELLE VERLUSTE HAFTBAR, DIE DIREKT ODER INDIREKT DURCH DIE MANGELNDE EIGNUNG DES PRODUKTS FÜR IRGEND EINEN ZWECK ODER EINSATZ ENTSTEHEN, ODER DURCH IRGEND EINEN DIESBEZÜGLICHEN DEFECT ODER MANGEL, SELBST WENN DAXTEN ODER EIN AUTORISIERTER DAXTEN-HÄNDLER AUF DIE MÖGLICHKEIT SOLCHER SCHÄDEN ODER VERLUSTE HINGEWIESEN WURDE.



DAXTEN

**THE BRAINS BEHIND
KVM SWITCHING & SHARING**



www.daxten.com

Unit 5 Distribution Centre
Shannon Free Zone
Shannon, Co. Clare

Ireland

info.ie@daxten.com
www.daxten.ie

Tel: +353 (0) 61 23 4000
Fax: +353 (0) 61 23 4099



Künstlergasse 11/4
A-1150 Wien

Österreich

info.at@daxten.com
www.daxten.at

Tel: +43 (0)1 879 77 65
Fax: +43 (0)1 879 77 65 30



C/Florian Rey, 8
50002 Zaragoza

España

info.es@daxten.com
www.daxten.com.es

Tel: +34 902 197 662
Fax: +34 976 201 633



1579 Lexington Road
Green Oaks, IL 60048

USA

info.us@daxten.com
www.daxten.us

Tel: +1 847 816 1337
Fax: +1 847 816 4558



Salzufer 16, Geb. B
10587 Berlin

Deutschland

info.de@daxten.com
www.daxten.de

Tel: +49 (0) 30 8595 37-0
Fax: +49 (0) 30 8595 37-99



B.P 04 - 77
Route de Cheptainville
91630 Marolles-en-Hurepoix

France

info.fr@daxten.com
www.daxten.fr

Tel: +33 (0)1 64 56 09 33
Fax: +33 (0)1 69 14 88 34



4 Harp Business Centre
Apsley Way
London NW2 7LW

United Kingdom

info.uk@daxten.com
www.daxten.co.uk

Tel: +44 (0) 20 8438 3800
Fax: +44 (0) 20 8438 3899



Seebahnstr. 231
8004 Zürich

Schweiz

info.ch@daxten.com
www.daxten.ch

Tel: +41 (0) 43 243 32 11
Fax: +41 (0) 43 243 32 16



Udviklingsparken
Sønderhøj 46
8260 Viby J

Denmark

info.dk@daxten.com
www.daxten.dk

Tel: +45 8734 5610
Fax: +45 8734 5611

