

# AutoView 2000


## AutoView 2000



Avocent's multi-user AutoView 2000 KVM switch delivers simple, reliable and convenient connectivity to all major server platforms. AutoView 2000 features end-to-end CAT 5 connections, advanced cable management and powerful on-screen management. The AVRIQ CAT 5 designed cable interface automatically assigns and retains unique server names for each attached server, which simplifies installation and eases re-configuration.

## Features and Benefits

- All CAT 5 cabling reduces cable bulk
- Supports all major server platforms
- Flexible access for two simultaneous local users
- One click, flash upgrades for all connected AVRIQs
- Advanced on-screen management provides easy configuration and server selection

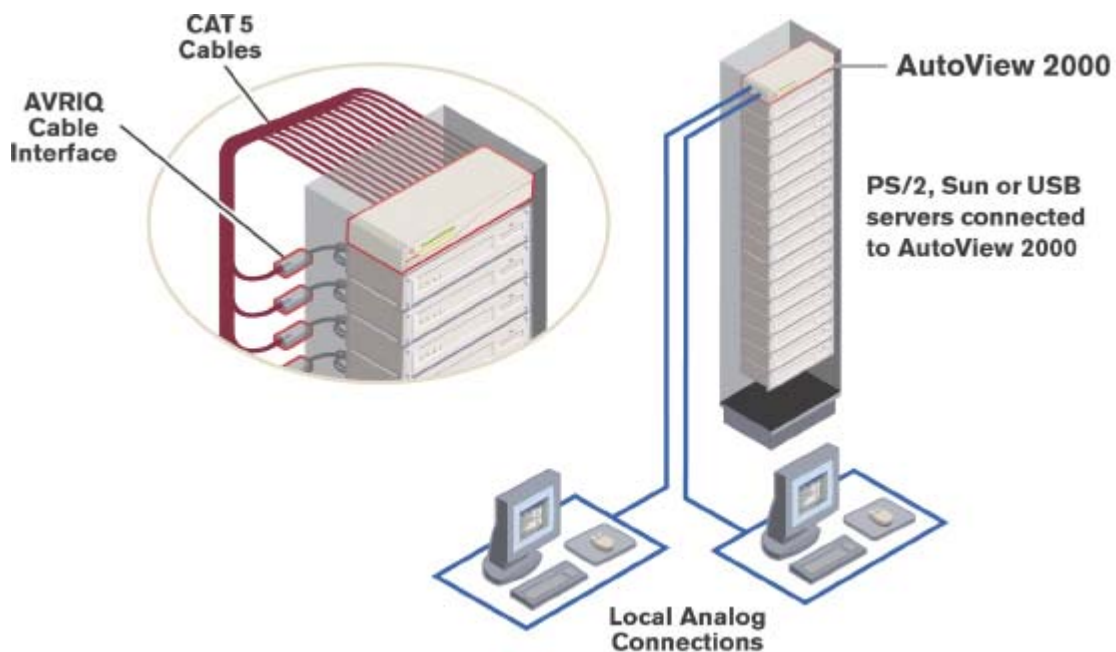

# AutoView 2000

<b>Mechanical</b>	Height	1.7 in. (4.5 cm)
	Width	17.2 in. (43.7 cm)
	Depth	6.5 in. (15.61 cm)
	Weight	4.8 lbs. (1.91 kg)
<b>Environmental</b>	Operating Temp	41F (0C) to 104F (40C)
	Storage Temp	-4F (20C) to 122F (50C)
<b>Power</b>	Operating Voltage	100 - 240 VAC, 50 - 60 Hz
	Power Frequency	
	Input Power	
<b>Supported Hardware</b>	Computers	IBM PC/AT, PC and 100% compatibles
	Monitors	XGA, XGA-II with adapter, 1600 x 1200 @ 85 Hz resolution
	Peripherals	PC keyboard, PC mouse, Microsoft Explorer mouse, Microsoft IntelliMouse family, IBM Scrollpoint, Logitech Mouseman Wheel, Logitech Trackman Marble Wheel, Logitech Marble FX and Kensington 4-button mouse
<b>Standards</b>	Approved Agency	

## Ordering Information

Art.-Nr.	AutoView 1000R/2000R		Price €
5116-0162	AutoView 2000 2 User , 16 CPUs	Incl. AVWorks	1.700,00
Art.-Nr.	CPU Interface-Adapter		in €
6364-01RP	AVRIQ PS/2 CPU Adapter	Additional RJ45 patchcable needed	115,00
6364-01RU	AVRIQ USB CPU Adapter	Additional RJ45 patchcable needed	100,00
6364-01RV	AVRIQ SUN VGA CPU Adapter	Additional RJ45 patchcable needed	100,00
6364-01RW	AVRIQ SUN 13W3 CPU Adapter	Additional RJ45 patchcable needed	110,00