


4x1 DVI/ADC Switcher

DVI, ADC, USB and Audio Switcher

Switch between any four computers using DVI or ADC displays, USB and Audio

Features


- Saves money on hardware costs
- Saves space on your desktop
- Saves time and increases productivity
- Maintains highest resolution video
- No loss of quality
- Use either PC or Mac with USB keyboard/mouse
- Switch between four DVI, USB and audio sources
- Switch between four computers using Apple flat panel displays
- Offers additional DVI output
- RMT-4 remote control option
- RMT-4IR IR remote control
- Rackmountable

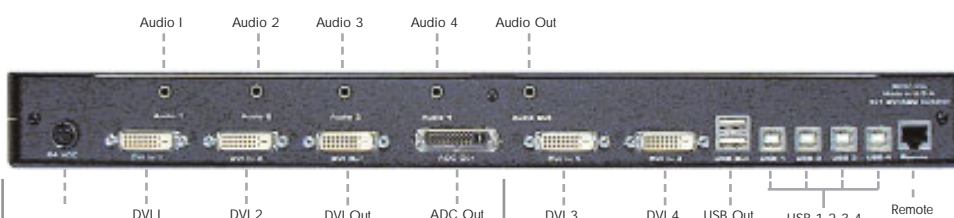

Now you can switch easily and reliably between any combination of four DVI, ADC, USB, and audio equipped computers - using only one keyboard, monitor and mouse. Gefen's 4x1 DVI/ADC Switcher also switches analog monitors to Apple flat panel displays.

How it works

Simply plug your video, USB and audio peripherals directly into the switcher outputs, connect the cables between the inputs and the computers you want to control, select the computer you want to work on, and you're switching. Even choose between the Macintosh or PC keyboard/video/mouse combination.

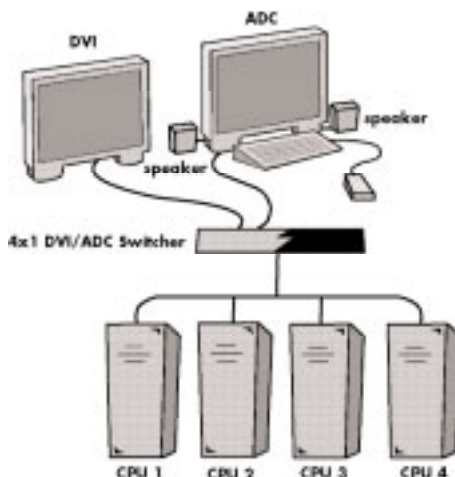

Switching between computers is done from the 4x1 DVI/ADC Switcher remotely using the ex-ten-d-it RMT-4IR, IR remote control or the RMT-4 wired remote.

Includes

1. the 4x1 DVI/ADC Switcher
2. 4x 6' DVI cable (m-m)
3. 4x 6' USB cable (A-B)
4. 4x 6' audio cable
5. 24V power supply

Specifications:

Video Amplifier Bandwidth: 1.65 GHz
Single Link Range: 1920 x 1200
Vertical Frequency Range: 60 Hz
DVI Input and Output Connectors: Type DVH
ADC Output Connectors: JAE 31 pin
USB Input Connectors: Type "B"
USB Output Connectors: Type "A"
Power Consumption: 60 Watts (max.)
Power Supply: 24VAC
Dimensions: 17" W x 1.75" H x 4" D
Rackmountable: 1 Rack Space
Shipping Weight: 12 lbs.